


PH: + 1 817 438 4777 / FAX: + 1 940 294 1429

ADDRESS: 2411 E FM 917, #200, Mansfield, TX 76063 – USA

## ABS5006 Silicone Foam Tapes

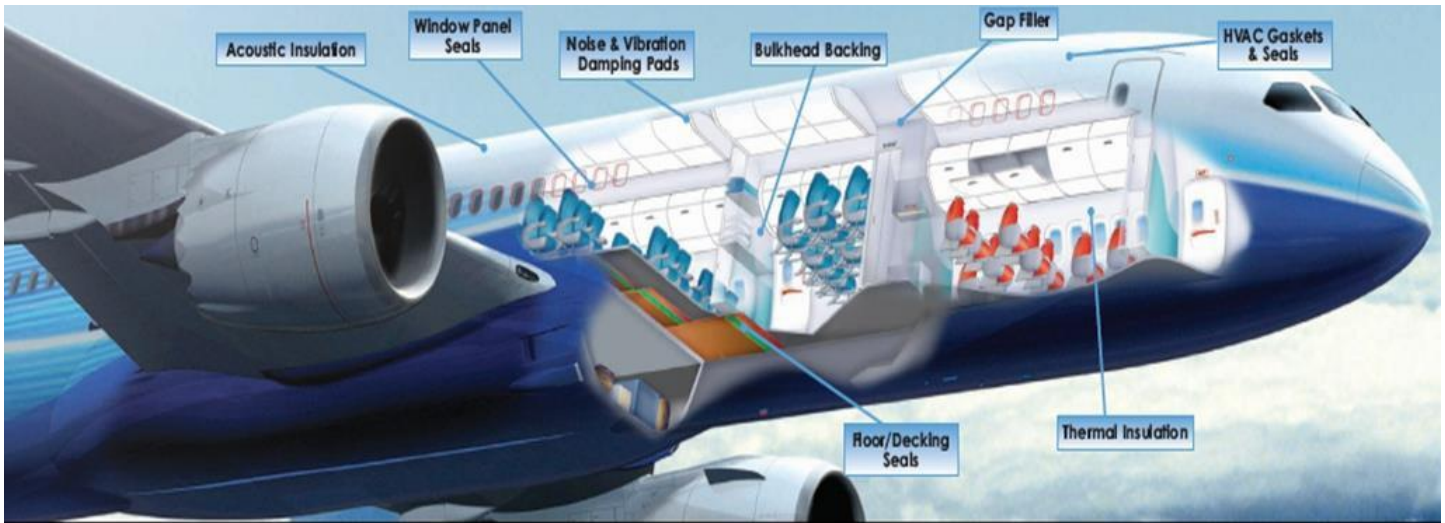

*AeroWindTech Inc. is an authorized distributor and converter for Rogers Corporation Bisco Silicones division.*

### Purpose

ABS5006 is specified for the aerospace manufacturing/repair industries as a floor decking seal, thermal insulation, bulkhead backing and noise and vibration dampening pad and meets FAR 25.853 requirement as per manufacturers SRM & CMM manuals.

### Composition

Low weight cellular silicone one side adhesive. Colors are white, gray or black.

### Storage

ABS5006 should be stored in a dry cool environment. Shelf life is 18 months from date of shipment when stored at or below 70°F-80°F and a relative humidity of 45-55%.

### Configurations

ABS5006-2A	Width: 9 mm; Thickness: 2 mm	ABS5006-4A	Width: 9 mm; Thickness: 4 mm
ABS5006-2B	Width: 12 mm; Thickness: 2 mm	ABS5006-4B	Width: 12 mm; Thickness: 4 mm
ABS5006-2C	Width: 19 mm; Thickness: 2 mm	ABS5006-4C	Width: 19 mm; Thickness: 4 mm
ABS5006-2D	Width: 25 mm; Thickness: 2 mm	ABS5006-4D	Width: 25 mm; Thickness: 4 mm
ABS5006-2E	Width: 30 mm; Thickness: 2 mm	ABS5006-4E	Width: 30 mm; Thickness: 4 mm
ABS5006-2F	Width: 38 mm; Thickness: 2 mm	ABS5006-4F	Width: 38 mm; Thickness: 4 mm
ABS5006-2G	Width: 50 mm; Thickness: 2 mm	ABS5006-4G	Width: 50 mm; Thickness: 4 mm
ABS5006-2H	Width: 80 mm; Thickness: 2 mm	ABS5006-4H	Width: 80 mm; Thickness: 4 mm

\*Additional widths and thicknesses available per ABS5006 specification i.e-6mm thickness.